

BARRIER NETTING FOR BEACH COURTS

Art. no. 15 544

Made from aluminium profiles, square 80x80 mm, reinforced, ribbed. Profiles mounted in special ground sockets with bases for burring in the sand. Grounds sockets don't have to be affixed in concrete. Height of profile after placing in ground socket: 4,0 m; 5,0 m; 6,0 m. Profile has special channel for affixing the net using PP hooks. Knotless net made from high strength polypropylene. Eye 12x12 cm, 10x10 cm, 4,5x4,5 cm. Strand thickness 2,3 mm; 3,0 mm; 4,0 mm; 4,75 mm. Colour: green, black, blue, white. Certificate DIN EN ISO 9001 : 2000.



Profile has special channel for affixing the net using PP hooks.




Aluminium profiles, square 80x80 mm, reinforced, ribbed.



Knotless net made from high strength polypropylene. Eye 12x12 cm, 10x10 cm, 4,5x4,5 cm. Strand thickness 2,3 mm; 3,0 mm; 4,0 mm; 4,75 mm. Colour: green, black, blue, white. **Certificate DIN EN ISO 9001 : 2000.**



Profiles mounted in special ground sockets with bases for burring in the sand. Grounds sockets don't have to be affixed in concrete.

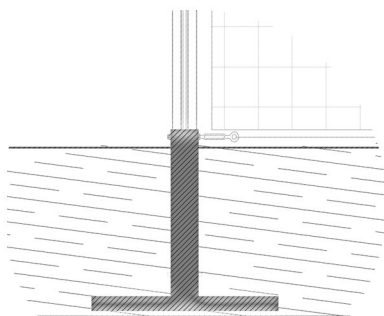

Net attached to the top and bottom part using steel line 3 mm thick, steel carabiners, galvanised.